


Designed & Made By:
Borg Alarab Control International Co.



BACI
Technology At Its Finest



www.bacieg.com

USB Charging & Sync. Cables



MICRO B



TYPE C



LIGHTNING


Types	Micro B, Type C, Lightning
Length	90cm, 100cm, 200 cm (can be customized)
Nominal Output	3A (Peak < 4.5A)
Cable Specs	<ul style="list-style-type: none">* 4 cores made of 99.99% pure copper* Cores are insulated with high quality PVC* Cores are twisted to reduce data interference* Outer sheath PVC is highly resistant to wear, temp. and moisture* Gold plated connectors to offer best conductivity* Supports fast charging safely* Color coding: Red: V Black: Gnd Green: D+ White: D-
Model Codes	AM90, AC90, AL90 - AM1, AC1, AL1 - AM2, AC2, AL2

www.bacieg.com

USB Charging & Sync. Cables



TYPE C to LIGHTNING

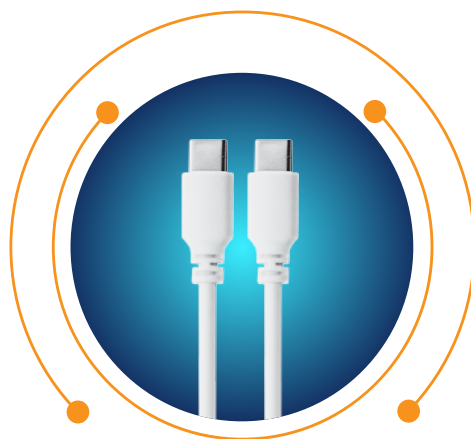

TYPE C to TYPE C

Types	Type C to Lightning , Type C to Type C
Length	100cm (can be customized)
Nominal Output	20W
Cable Specs	<ul style="list-style-type: none">* 5 cores made of 99.99% pure copper* Cores are insulated with high quality PVC* Cores are twisted to reduce data interference* Outer sheath PVC is highly resistant to wear, temp. and moisture* Gold plated connectors to offer best conductivity* Supports fast charging safely* Color coding: Red: V Black: Gnd Green: D+ White: D- Grey: Vcc
Model Codes	CC1,CL1

www.bacieg.com

USB Wall Chargers



1 USB Outlet

Input	220V 50Hz
Output	18W QC3.0
Charger Qualities	<ul style="list-style-type: none">* Top-notch smart components offering the most advanced charging technique (QC3.0)* Effectively protects connected devices against sudden voltage surges* Outer body is robust and shock resistant* Compact size and shape for travelling
Model Code	WC1

USB Car Chargers



2 USB Outlets

Input	12-24V DC
Output	14W QC3.0 & 5V 3.1A
Charger Qualities	<ul style="list-style-type: none">* High tech. components offering the most advanced charging technique (QC3.0)* Compatible with all market devices* Effectively protects connected devices from sudden electrical voltage surges* Outer body is robust and shock resistant* Car trip essentials
Model Code	CC2

USB OTGs



Micro B to Male A



Type C to Male A



Lightning to Micro

Types	Micro B to Male A, Type C to Male A, Lightning to Micro
Charging Ability	Charge devices up to 5V 3A safely
Data Transfer Rate	Supports data rate of 48 MB/s to mass storage devices
Communication Protocols	Supports Attach Detection Protocol (ADP), Session Request Protocol (SRP) and Host negotiation protocol (HNP)
Model Codes	MOTG, COTG, LOTG

3.5mm AUX Cables



Types	Male to Male, Male to Female
Length	100 cm 3.5mm
Connector Type	4 pin gold plated connector
Cable Specs	<ul style="list-style-type: none">* 4 cores are made of 99.99% pure copper* Cores are insulated with high quality PVC* Cores are twisted to reduce data interference* Outer sheath PVC is highly resistant to wear, temp. and moisture* Gold plated 4 pin connectors to offer clear sound without distortion* Color coding: Red: SPK Left Black: Gnd Green: SPK Right White: MIC
Model Codes	AUX1, AUX extension

3.5mm AUX Converters



Female AUX to LIGHTNING



FEMALE AUX to Type C

Types	Female AUX to LIGHTNING , FEMALE AUX to Type C
Length	15 cm
Connector Type	4 pin gold plated connector
Cable Specs	<ul style="list-style-type: none">* 4 cores are made of 99.99% pure copper* Cores are insulated with high quality PVC* Cores are twisted to reduce data interference* Outer sheath PVC is highly resistant to wear, temp. and moisture* Gold plated 4 pin connectors to offer clear sound without distortion* Color coding: Red: SPK Left Black: Gnd Green: SPK Right White: MIC
Model Codes	AUXC, AUXL

USB Printer Cables



Connection Type	Male to Male, Male to Female
Length	100 cm 3.5mm
Cable Specs	<ul style="list-style-type: none">* 4 cores are made of 99.99% pure copper* Cores are insulated with high quality PVC* Cores are twisted to reduce data interference* Outer sheath PVC is highly resistant to wear, temp. and moisture* Gold plated connectors to offer best conductivity* Color coding: Red: Vcc Black: Gnd Green: D+ White: D-
Model Codes	PRT1, PRT2

USB Charger with Cable



MICRO B



TYPE C



LIGHTNING

Types	Micro B, Type C, Lightning cables with 1 USB outlet charger
Cable Length	100 cm
Charger output	18W QC3.0
Cable Specs	<ul style="list-style-type: none">* 4 cores are made of 99.99% pure copper* Cores are insulated with high quality PVC* Cores are twisted to reduce data interference* Outer sheath PVC is highly resistant to wear, temp. and moisture* Gold plated 4 pin connectors to offer clear sound without distortion* Color coding: Red: Vcc Black: Gnd Green: D+ White: D-
Charger Qualities	<ul style="list-style-type: none">* Top-notch smart components offering the most advanced charging technique (QC3.0)* Effectively protects connected devices against sudden voltage surges* Outer body is robust and shock resistant* Compact size and shape for travelling
Model Codes	WCAM1, WCAC1, WCAL1

www.bacieg.com



USB Charger with Cable



1 USB CHARGER VOOC + CABEL TYPE C

Types	Type C Cable with 1 USB outlet charger
Cable Length	100 cm
Charger output	25W SuperVOOC
Cable Specs	<ul style="list-style-type: none">* 4 cores are made of 99.99% pure copper* Cores are insulated with high quality PVC* Cores are twisted to reduce data interference* Outer sheath PVC is highly resistant to wear, temp. and moisture* Gold plated 4 pin connectors to offer clear sound without distortion* Color coding: Red: Vcc Black: Gnd Green: D+ White: D-
Charger Qualities	<ul style="list-style-type: none">* GIVES BEST CHARGING OVER FOLLOWING PROTOCOLS: (PD, FLASH, TURBO, WARP, QC3.0, QC4.0, VOOC, SUPER VOOC)
Model Codes	SVOOC

www.bacieg.com

POWER BANK



POWER BANK

Cable Type	Type C High Quality Cable
Input	Dual 5v 2.1A
output	1 Output PD 22.5W, 2 Outputs 5v 2.4A At the same time
Battery Capacity	10000mAh
Screen	Charging & Discharging Digital Screen
Model Codes	PB10

www.bacieg.com

HANDSFREE In-Ear Headphones



AUX



TYPE C



LIGHTNING

Types	In-Ear Headphones
Sensitivity	40±3db
Speaker Impedance	32Ω
Power	3-5 mW
Frequency	50:20KHZ
Horn Size	14.2 mm
Model Codes	IEA, IEC, IEL

www.bacieg.com

HANDSFREE

Half In-Ear Headphones



AUX



TYPE C



LIGHTNING

Types	Half In-Ear Headphones
Sensitivity	40±3db
Speaker Impedance	32Ω
Power	3-5 mW
Frequency	50:20KHZ
Horn Size	14.2 mm
Model Codes	HIEA, HIEC, HIEL

www.bacieg.com